




VMH06SV-1	6,000 BTU/H(208/230V)	Wall Mounted Heat Pump System
Location: _____	Approval: _____	
Engineer: _____	Date: _____	
Submitted to: _____	Construction: _____	
Submitted by: _____	Unit #: _____	
Reference: _____	Drawing #: _____	

Set Code	22022010016397
Indoor unit code	22022011017201
Outdoor unit code	22022016016320
Set Model	
Indoor unit model	B-VMH06SV-1
Outdoor unit model	A-VMH06SV-1
Certified	
AHRI	
UL	



SYSTEM PERFORMANCE DATA		
Power supply		
Normal Operational Voltage	(V, Ph, Hz)	208/230,1,60
Voltage Range	(V)	187-253
Electrical		
Minimum circuit ampacity	(A)	13.0
Max.fuse	(A)	15.0
Connection wiring		16*4 AWG
Cooling		
Rated Capacity	(Btu/h)	6000
Capacity Range	(Btu/h)	3400~12000
Power Input (Max)	(W)	380
Rated current	(A)	3.3
SEER	(Btu/W)	26.5
EER	(Btu/W)	15.8
Heating at 47F		
Rated Capacity	(Btu/h)	7000
Capacity Range	(Btu/h)	3300~11500
Power Input (Max)	(W)	449
Rated current	(A)	3.92
HSPF4	(Btu/W)	14
HSPF5	(Btu/W)	11
COP	W/W	3.92
Heating at 17F		
Max Capacity	(Btu/h)	9000
REFRIGERANT PIPE DATA		
Design pressure	(PSIG)	550/340
Refrigerant Type	(Oz)	R410A/38.1
Refrigerant precharge	(ft)	25.0
	(m)	7.6
Additional charge for each ft	(oz/ft)	0.16
	(g/ft)	15
Liquid side/ Gas side	(inch)	1/4" / 3/8"
	(mm)	6.35 / 9.52
Max. pipe length	(ft)	82.0
	(m)	25.0
Max. difference in level	(ft)	32.8
	(m)	10.0
Connection method		(Flared)
Indoor(cooling/ heating)	(Deg. °F)	60~90 / 32~86
	(Deg. °C)	16~32 / 0~30
Outdoor(cooling/heating)	(Deg. °F)	-13~122 / -13~75
	(Deg. °C)	-25~50 / -25~24
Application area	(sq.ft)	86.11~129.17
	(m2)	8~12

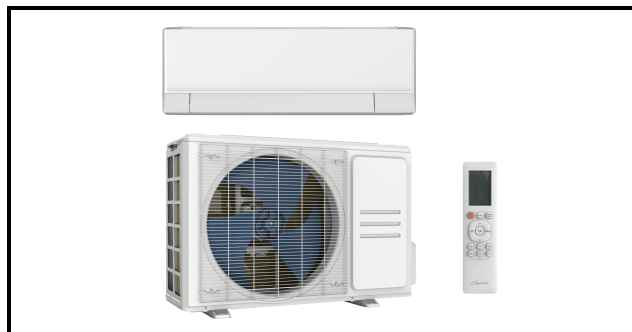
INDOOR UNIT DATA		
Indoor fan motor		
Type		Cross-Flow
Model		ZKFP-20-8-6-7
Qty		1
Input	(W)	50.0
RLA	(A)	0.41
LRA	(A)	---
Winding Resistance	(Ω)	---
Capacitor	(uF)	---
Speed(Hi/Mi/Lo)	(r/min)	1050/930/870
Air flow & Noise level		
Indoor air flow (Hi/Med/Lo) (No d)	(CFM)	317.65/217.65/167.65
Indoor noise level (Hi/Med/Lo)	[dB(A)]	36/32/23
Dehumidification		
	(Pint/H)	---
Indoor unit		
Dimension (WxDxH)	(inch)	31.30x8.86x11.61
	(mm)	795x225x295
Packing (WxDxH)	(inch)	34.25x14.57x12.01
	(mm)	870x370x305
Net/Gross weight	(lbs.)	22.71/28.88
	(kg)	10.3/13.1

OUTDOOR UNIT DATA		
Compressor		
Type		KSK103D33UEZ3
Model		ROTARY
Brand		GMCC
Capacity	(Btu/h)	6944 / 11107
Input	(W)	325 / 826
Rated current (RLA)	(A)	-
Refrigerant oil/oil charge	(ml)	-
Throttle		Capillary +EXV
Outdoor fan motor		
Model		ZKFN-34-10-1
Qty		1
Input	(W)	--
RLA	(A)	--
Speed	(r/min)	800/600
Air flow & Noise level		
Outdoor air flow (Max.)	(CFM)	1294.10
Outdoor noise level	[dB(A)]	53
Outdoor unit		
Dimension (WxDxH)	(inch)	30.12x11.93x21.85
	(mm)	765x303x555
Packing (WxDxH)	(inch)	34.92x13.27x24.02
	(mm)	887x337x610
Net/ Gross weight	(lbs.)	63.71/69.00
	(kg)	28.9/31.3

Indoor unit dimension

General Features

- Intelligent Eye(optional)
- Easy Installation
- Easy Maintenance
- Easy Clean
- High Efficiency
- Wireless Remote with LCD Display

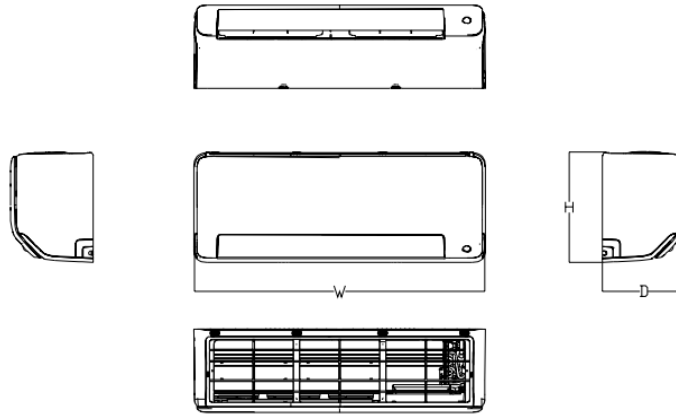

Capacity	Body Code	W(mm/inch)	D(mm/inch)	H(mm/inch)
9k~12k	B	795/31.3	225/8.86	295/11.61
18k~24k	C	965/38	239/9.41	319/12.56
24k~36k	D	1140/44.88	275/10.83	370/14.57

Outdoor unit dimension

